

CORE RCH160


DESCRIPTION

The RCH160 is the hybrid step between an ERV and HRV product. It has the exact same thermal efficiency and pressure drop of the RC160, with additionally moisture transfer due to the integrated membrane technology.


PRODUCT BENEFITS

- Available with fire protection
- Available heights: 100 – 500 mm
- Leakage: < 1 % of nominal flow rate, 100 % leakage tested
- Material resistance: -30 °C – +50 °C (very low freezing point)

SENSIBLE EFFICIENCY

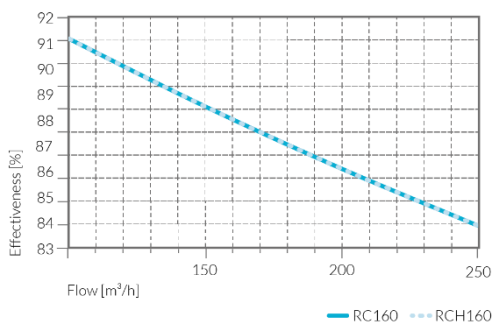


PRESSURE DROP

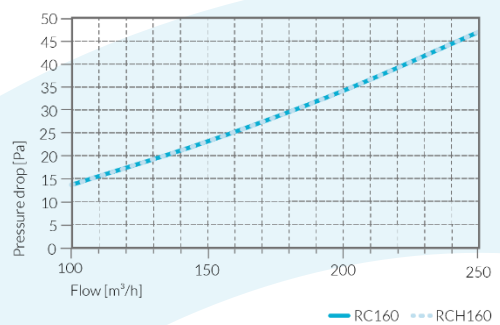


*Based on test conditions following DIN EN 308:1997-06
(Environmental conditions: temp. 14°C, humidity 12%; inside conditions: 20°C, humidity 58%)

LATENT EFFICIENCY

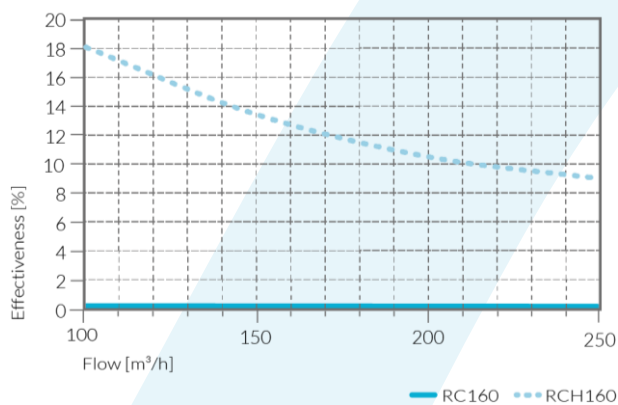

*Based on test conditions following DIN EN 308:1997-06
(Environmental conditions: temp. 14°C, humidity 12%; inside conditions: 20°C, humidity 58%)

DIMENSIONS [mm]

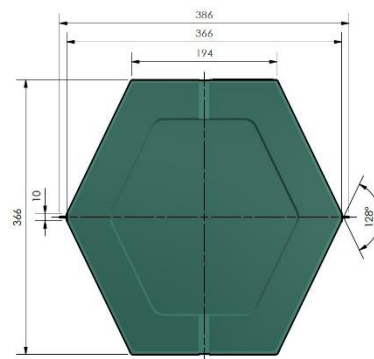

Visit us at www.core.life to learn more about us and our products.
We look forward to hearing from you!