

CORE RS220


DESCRIPTION

The RS220 is the smallest in the range, designed for HRV units with low flow requirements like single room applications.


PRODUCT BENEFITS

- Special PS for hygienic purposes
- Available with fire protection
- Available heights: 150 – 500 mm
- Leakage: < 1 % of nominal flow rate, 100 % leakage tested
- Material resistance: -30 °C – +50 °C (very low freezing point)

EFFICIENCY

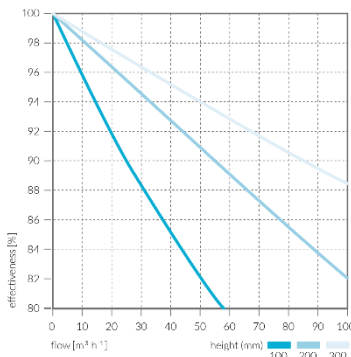


PRESSURE DROP

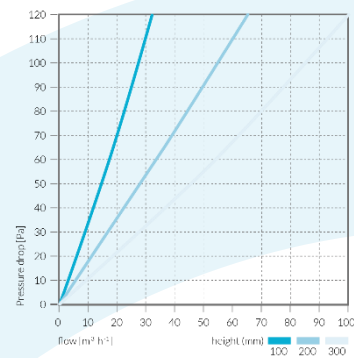

*Based on test conditions following DIN EN 308:1997-06
(Environmental conditions: temp. 14°C, humidity 12%; inside conditions: 20°C, humidity 58%)

DIMENSIONS [mm]

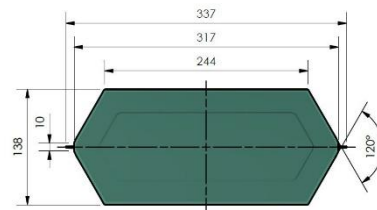

Visit us at www.core.life to learn more about us and our products.
We look forward to hearing from you!